

# PERFORMANCE DATA SHEET

## DIMENSIONAL DATA

AVAILABLE LENGTHS:	1 1/8", 2", 3"
PT. TYPE & DIAMETER:	35° SHARP POINT
MAJOR DIAMETER:	.197 / .205
MINOR DIAMETER:	.128 / .136
HEAD:	#2 PHILLIPS SQUARE WAFER
HEAD DIAMETER:	.423 / .443

## WASHER DATA



INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS
-	-	-

## PLATTING & PAINT

PLATTING TYPE:	1 MIL MECHANICAL ZINC
PAINT:	POLYMER BASED WET PAINT

## STRENGTH CHARACTERISTICS

NOM. TENSILE	1612 LBS
MIN. TORSIONAL	61 IN-LBS
NOM. SHEAR	1272 LBS

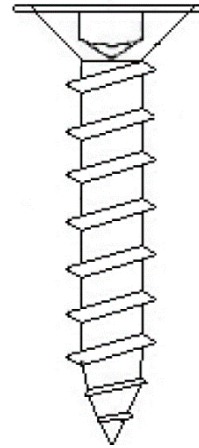

*\*Drawing not to scale.*

## PULL OUT STRENGTH

SUBSTRATE	PLYWOOD			OSB	SOUTHERN PINE		SPRUCE PINE FIR	
	3/4"	5/8"	1/2"		1"	1 1/2"	1"	1 1/2"
	740	388	401	252	765	1269	583	1039

## PULL OVER STRENGTHS (LBS ULT)

	MATERIAL			
DESIGNATION	AZ55 GALVALUME			
NOM. GAUGE	29	26	24	22
THICKNESS	0.015	0.019	0.024	0.032
	626	N/A	N/A	N/A

*\*\*\*The strength characteristics provided on this sheet are to be used as guidelines only. All strength values are shown in ultimate values and are expressed in pounds. Consideration of safety must be applied by the user to obtain allowable design limits.*

4150 S 100TH E AVE  
SUITE 310  
TULSA, OK 74146

PH: 800-800-8590  
FAX: 918-622-4636



DATE:	REVISED	REVISION	ENGR. CHG.	NO.
-------	---------	----------	------------	-----

**#10 QUIKGRIP METAL2WOOD  
ULTRA-LO CLIP SCREW**