

FLEX-O-VENT

UNIVERSAL VENTING MATERIAL

Specially formulated coated polyester has been manufactured from recycled material and is recyclable.



Marco's Flex-O-Vent™ Universal Venting Material vents, protects and lasts like no other.

While polyurethane products constantly expand (as they soak up water) and contract (as they dry out) causing them to disintegrate and fail, Flex-O-Vent offers 40 years of Weather-Tite performance. Its specially formulated polyester, manufactured from recycled material, prevents moisture absorption and

holds together to help keep out pests. Flex-O-Vent is also extremely durable, flame-resistant, clog-resistant, and tear-resistant.

Flex-O-Vent is not only an economical choice, it's a long-term solution that provides plenty of cooling air flow, which is vital to meet building codes, reduce utility costs, and minimize long-term building damage caused by improper ventilation.

- Won't absorb moisture, which can freeze and block all ventilation
- M63 Marco proprietary adhesive for superior hold
- Easy, one-person installation
- 40-year limited warranty
- ASTM testing: D1929, D737
- Available in 10' and 20' rolls and multiple packaging options



➤ FLEX-O-VENT GOOD ▲

Our original, most economical polyester-based ventilation product.

FLEXPRO BETTER ▲

New! A profile-cut strip or roll designed to fit most roof panels.

LP2 RIDGE VENT BEST ▲

Premier custom-cut vent strip includes Python™ polyester vent material inserts for optimum fit and ventilation.

The Marco Weather-Tite™ System

Closure

Ventilation

Fasteners

Flashing

Sealants

Underlayment

Accessories

- ▶ Value drives everything we do. That's why we developed the Marco Weather-Tite System—a comprehensive line of products that offers easy installation, remarkable building ventilation, lower utility costs, extreme durability, and outstanding warranties. Get more quality, more performance and more value ... from Marco.



Marco's proprietary M63 continuous double-bead adhesive is key to quick, easy Flex-O-Vent installation.

Specs

Net Free Area: FOV - 1" free-standing product, NFA 23 sq. in.*

1- 1/2" x 3" x 10': Rib heights up to 1-1/4"

1- 1/2" x 2" x 10': Rib heights up to 1-1/4"

1" x 3" x 10': Rib heights up to 3/4"

1" x 2" x 10': Rib heights up to 3/4"

Air Permeability: >760 cubic feet per minute

Cold Cracking: -55° C (-130° F)

Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175%

Compressive Strength: 1.8 psi at 75%

Abrasion: No Damage

*Effective Net Free Area varies based on product height, panel profile, and installation methods.



You May Also Need

- ▶ Roof Boots™ / Weather-Tite Metal Roof Sealant

Easy Install


See our installation instructions online at MarcoIndustries.com. With Flex-O-Vent, one size fits most panels.

Installation is a simple three-step process easily handled by one installer. Flex-O-Vent comes in easy-to-handle 10-foot rolls (mirroring most ridge cap lengths) or larger 20-foot rolls if you prefer. It is easily cut with scissors or utility knife and a double bead of M63 adhesive holds Flex-O-Vent securely in place until the ridge cap is installed.




Step 1:

Make sure panel is free of dust and debris. If not pre-cut, cut 2" slot at ridge. Measure and mark where the ridge cap will sit on the panel.

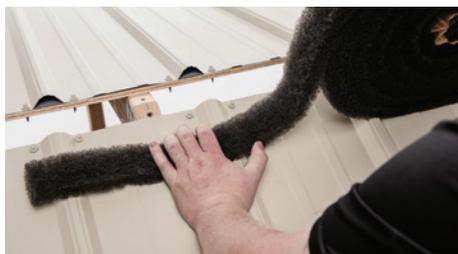

Step 2:

Start from the end of the ridge, rolling out Flex-O-Vent along the length of the ridge (both sides), making sure the vent sits "up-slope" from the edge of the ridge cap.

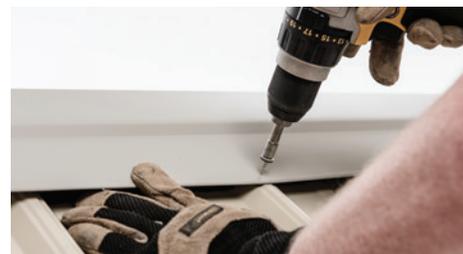

Step 3:

Apply ridge cap, compressing material between the ridge cap and major rib. Fasten at the major rib using a screw gun set to at least 2700 rpm.



Value through the Roof.

800.800.8590 / MarcoIndustries.com



Marco's Rapid Response™ delivers, faster and easier. Take advantage of free shipping with low minimum orders.