

UNDERLAYMENT

HYDRASHELL™ SUPREME SA | HYDRASHELL™ SUPREME | HYDRASHELL™ MAX



Value through the Roof.

Overdelivering On Underlayment.

Our proven HydraShell™ synthetic and self-adhering underlayment solutions provide superior protection for your roof and everything underneath it. We use only the best materials so we can back each product with industry-leading warranties, and give every Marco customer peace of mind that's absolutely Weather-Tite.



30
YEAR
LIMITED WARRANTY

HYDRASHELL SUPREME SA HT SELF-ADHERING SYNTHETIC ROOF UNDERLAYMENT

The best choice in high-temp, easy-to-handle, self-adhering applications.

- Split-back release film peels off for easy installation
- Adheres to a variety of substrates
- Polymer-modified asphalt gives excellent pliability
- Exceptionally durable high-tensile/tear strengths
- Cool Gray surface to reduce heat build-up
- 90-day UV exposure rating
- 30-year limited warranty
- Made in the USA

Specs

Boxed

Roll Dimensions: 36"/67'

Roll Weight: 55 lbs

Area Per Carton: 201 ft²

Cartons Per Pallet: 30

Permeability (ASTM E96): .067 perms

Nail Sealability (D1970): Pass

Adhesion To Plywood @ 75° F (D903): >12 lbs/ft

Adhesion To Plywood @ 40° F (D903): >2 lbs/ft

Mill Thickness (ASTM D5147): 44

Flexibility At -20° F (D1970): Pass

High Temperature Rating: 240° F

ASTM D 1970 | CSA A 123.22



The Marco Weather-Tite™ System

Closure

Ventilation

Fasteners

Flashing

Sealants

Underlayment

Accessories

Our underlayment products are made with only the highest quality materials. As part of the exclusive Marco Weather-Tite System, they are designed specifically for easy installation, superior performance, and tremendous value.



HydraShell SUPREME SA is not only ideal for standard roofing areas (shown), but also valleys, ridges, coping joints, chimneys, vents, dormers, skylights, and low-slope sections.

You may also need



Marco's Weather-Tite™
Metal Roof Sealant



LP2™ Ridge Vent



**LIFE
TIME**
LIMITED WARRANTY

HYDRASHELL SUPREME

HIGH-PERFORMANCE SYNTHETIC ROOF UNDERLAYMENT

The superior synthetic underlayment choice with a limited lifetime warranty.

- Superior lay-flat properties: won't wrinkle or absorb water
- Stays flexible in cold weather
- 20 times stronger than #30 felt
- Less weight per roll
- Low-slip bottom coating
- Cool Gray surface to reduce heat build-up
- 90-day UV exposure rating
- Class A fire rating
- Use on steeper slopes under asphalt shingles, synthetic shingles, cedar shakes, and metal
- Miami-Dade County Code approved
- Made in the USA

Specs

Roll Dimensions: 40"/300'

Permeability (ASTM E96): 0.1 perms

Water Transmission (ASTM D4869): Pass

Tear Strength (ASTM D4533): 38 lbs MD/37 lbs CD

Tensile Strength (ASTM D751): 120 lbs MD/115 lbs CD

Burst Strength (ASTM D751): 160 psi

Elongation (ASTM D751): 20%

Weight Per Square (ASTM D5261): 2.46 lbs

Nominal Thickness (ASTM D1777): 7.5 mils

Temp. Range (Internal): -70° F to 240° F



TDI | FBC | CSA A 123.3
ASTM D 4869 | ASTM E 108 | ASTM D226



Each 10-square roll of HydraShell SUPREME weighs less than 26 lbs, for easy handling and installation.



**30
YEAR**
LIMITED WARRANTY

HYDRASHELL MAX

SYNTHETIC ROOF UNDERLAYMENT

The reliable underlayment choice with a 30-year limited warranty.

- Won't wrinkle or absorb water
- Stays flexible in cold weather
- 25 times stronger than #15 felt
- 12 times stronger than #30 felt
- More coverage per roll
- Less weight per roll
- Requires fewer fasteners
- Cool Gray surface to reduce heat build-up
- 90-day UV exposure rating
- Class A fire rating
- Use under asphalt shingles, synthetic shingles, cedar shakes, and metal
- Miami-Dade County Code approved
- Made in the USA

Specs

Roll Dimensions: 40"/300'

Permeability: 0.1 perms

Water Transmission: Pass

Tear Strength: 33 lbs MD/24 lbs CD

Tensile Strength: 95 lbs MD/85 lbs CD

Burst Strength: 160 psi

Elongation: 20%

Weight Per Square: 1.96 lbs

Nominal Thickness: 6.2 mils

Temp. Range (Internal): -70° F to 240° F




TDI | FBC | CSA A 123.3
ASTM D 4869 | ASTM E 108 | ASTM D226



HydraShell SUPREME and MAX are attached with standard roof nails, making the installation simple, less expensive, and fast.

Value Through The Roof. Value drives everything we do. That's why we've delivered industry-leading products for more than twenty years. And that's why we developed the Marco Weather-Tite System — a comprehensive *line* of products that offers easy installation, remarkable building ventilation, lower utility costs, extreme durability, and outstanding warranties for your metal roof and wall systems. If you want to build it right, buy it smart. Get more quality, more performance and more value ... from Marco.

The Marco Weather-Tite™ System

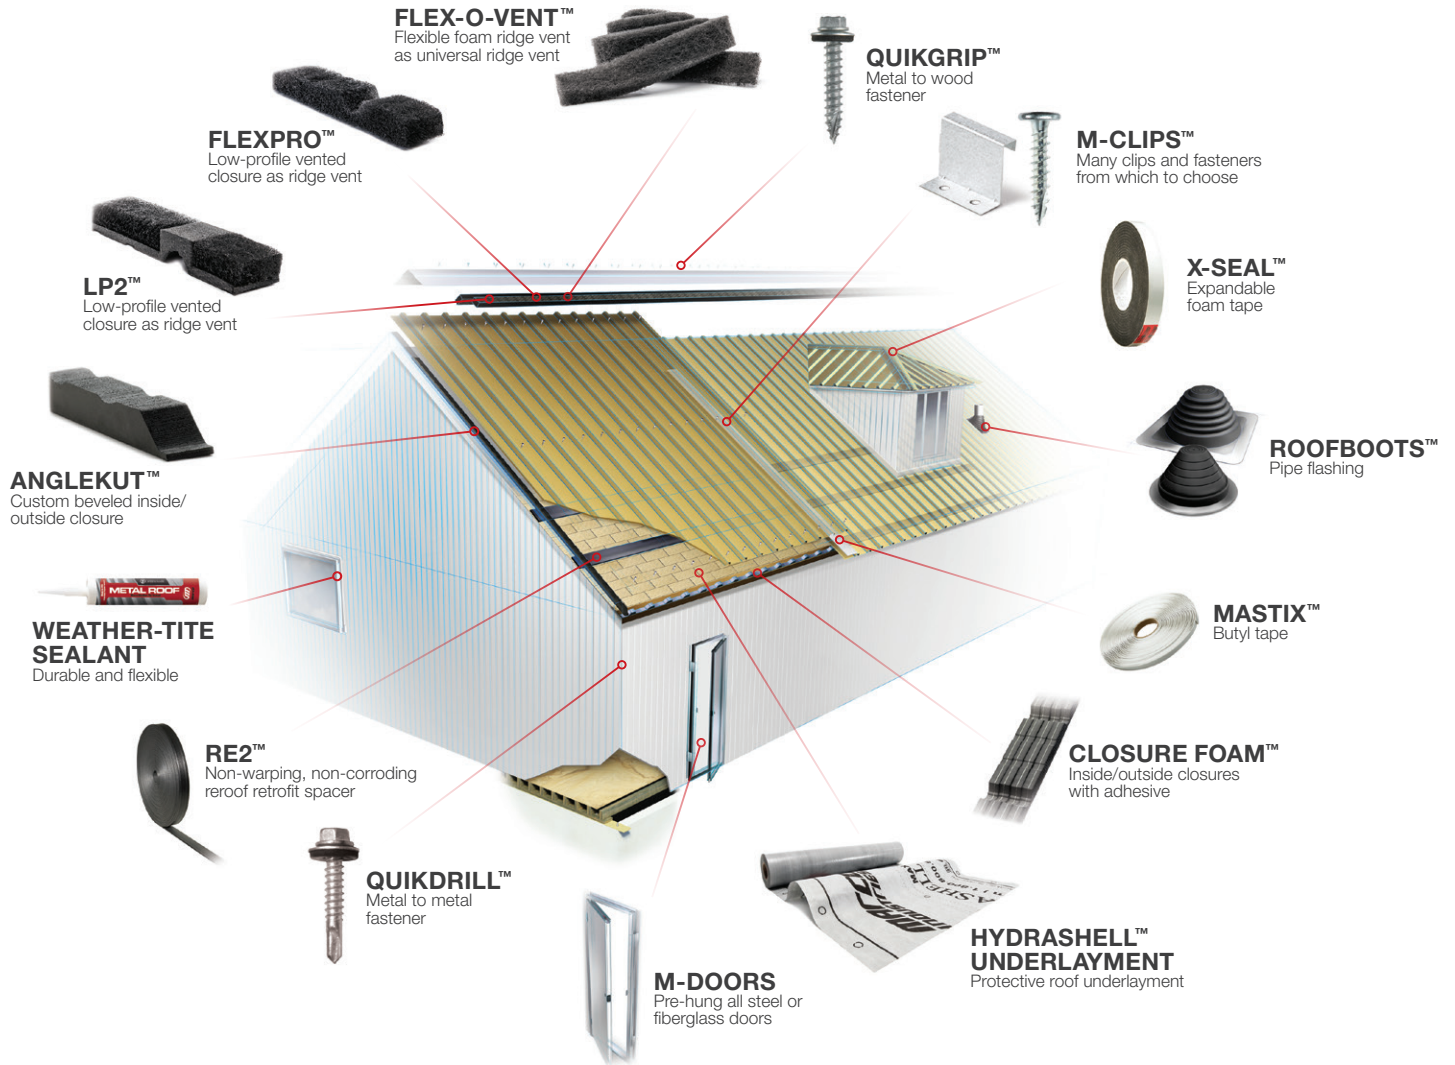

Value through the Roof.

800.800.8590 / MarcoIndustries.com



Marco's Rapid Response™ delivers, faster and easier. Take advantage of free shipping with low minimum orders.