

FLASHING

ROOFBOOTS™ | EXPANDABLE EDGE STRIP



Roofing Ventilation & Accessories

Get A Superior Seal, In A Flash.

Marco delivers everything you need to seal pipes securely. From a huge variety of Master Flash® RoofBoots to expandable edge strip for awkward flashing shapes and surfaces. With Marco as your one-stop-shop, you'll get the roof flashing you need quickly, and rest easy knowing you're getting industry-leading warranties and Weather-Tite performance.

The Marco Weather-Tite™ System

Closure

Ventilation

Fasteners

Flashing

Sealants

Underlayment

Accessories



Our flashing products are made of EPDM or silicone and compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light. As part of the exclusive Marco Weather-Tite System, they offer easy installation, superior performance, and tremendous value.

You may also need



Marco's Weather-Tite™
Metal Roof Sealant



Fasteners



UNIVERSAL ROOFBOOT

**ROUND
FLEXIBLE SLEEVE**

The proven choice with a 20-year warranty.

- Easy, on-site customization for superior fit
- Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction
- Maximum resistance to ozone weathering
- Available in black or grey EPDM, red or grey silicone, or colors upon request

ROOFBOOTS™

Specs

Ozone Resistance: 70 hrs @ 500pphm (EPDM and RS)*

High Temp. Resistance:

Intermittent: +135°C/+275°F (EPDM), +260°C/+500°F (RS)

Continuous: +100°C/+212°F (EPDM), +225°C/+437°F (RS)

Low Temp. Resistance: -55°C/-67°F (EPDM),
-74°C/-101°F (RS)

Compression Set: 25% (EPDM), 50% (RS)


*RS = Red Silicone

	Pipe Range	Base
Mini	0" - 3/4"	4" (101 mm)
#1	1/4" - 2 1/2"	3 1/4" (82 mm)
#2	1 3/4" - 3"	6 1/4" (158 mm)
#3	1/4" - 5"	7 3/4" (196 mm)
#4	3" - 6 1/4"	9 1/4" (234 mm)
#5	4 1/4" - 7 3/4"	10 1/2" (266 mm)
#6	5" - 9"	13" (330 mm)
#7	6" - 11"	14 1/2" (368 mm)
#8	7" - 13"	16 1/2" (412 mm)
#9	9" - 19"	25 1/4" (641 mm)



STANDARD ROOFBOOT

SQUARE FLEXIBLE SLEEVE



COMPLETE LINE OF FLASHING

SPECIALTY BOOTS / STRIP FLASHING

Standard 20-year warranty, 35-year warranty available.

- Easy, on-site customization for superior fit
- Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction
- Maximum resistance to ozone weathering
- The first ICC-listed flashing in the metal building industry with a 35-year warranty (available on black EPDM only)
- Available in black or grey EPDM, red or grey silicone, or colors upon request

Specs

Ozone Resistance: 70 hrs @ 500pphm (EPDM and RS)

High Temp. Resistance:

Intermittent: +135°C/+275°F (EPDM), +260°C/+500°F (RS)

Continuous: +100°C/+212°F (EPDM), +225°C/+437°F (RS)

Low Temp. Resistance: -55°C/-67°F (EPDM),

-74°C/-101°F (RS)

Compression Set: 25% (EPDM), 50% (RS)

*RS = Red Silicone

	Pipe Range	Base
Mini	1/8" - 3/4"	2 1/4" (57 mm)
#1	1/4" - 2 3/4"	4 1/2" (114 mm)
#2	7/8" - 4"	6" (152 mm)
#3	1/4" - 5 3/4"	8" (203 mm)
#4	2 3/4" - 7"	10" (254 mm)
#5	4" - 8 1/4"	11" (279 mm)
#6	4 3/4" - 10"	12" (279 mm)
#7	5 1/2" - 11 1/2"	14" (355 mm)
#8	6 3/4" - 13 1/2"	17" (431 mm)
#9	9 1/2" - 20 1/2"	25" (635 mm)
Maxi	12" - 28 1/2"	34" (863 mm)

Superior solutions for every flashing application.

Specialty

- Contact Marco for multi-flash, solar, multi-port and other specialty boots

Retrofit

- Round or square boots available in three sizes
- 20-year warranty
- Available in black or grey EPDM or silicone

Extreme Angle

- Choose to handle any extreme roof pitch
- 20-year warranty
- Available in black EPDM or grey silicone

Box Gutter Expansion Joint

- Expandable edge strip flashing in grey EPDM
- Flashes hi-rib and standing-seam profiles
- Stretch and form to fit and seal
- Flash between dissimilar materials
- Ideal for square ducts, chimneys, skylights
- 20-year warranty
- Available in 9" width by 12', 33' and 50' lengths

RoofBoot Installation

For a manufacturer's installation video or roof pitch calculator, visit marcoindustries.com/roofboots




Our Universal and Standard RoofBoots are available in black or grey EPDM, red or grey silicone, or these custom colors upon request. *Call for availability.



Value Through The Roof. Value drives everything we do. That's why we've delivered industry-leading customer service for more than twenty years. And that's why we developed the Marco Weather-Tite System—a comprehensive line of products that offers easy installation, remarkable building ventilation, lower utility costs, extreme durability, and outstanding warranties. If you want to build it right, buy it smart. Get more quality, more performance and more value ... from Marco.

The Marco Weather-Tite System

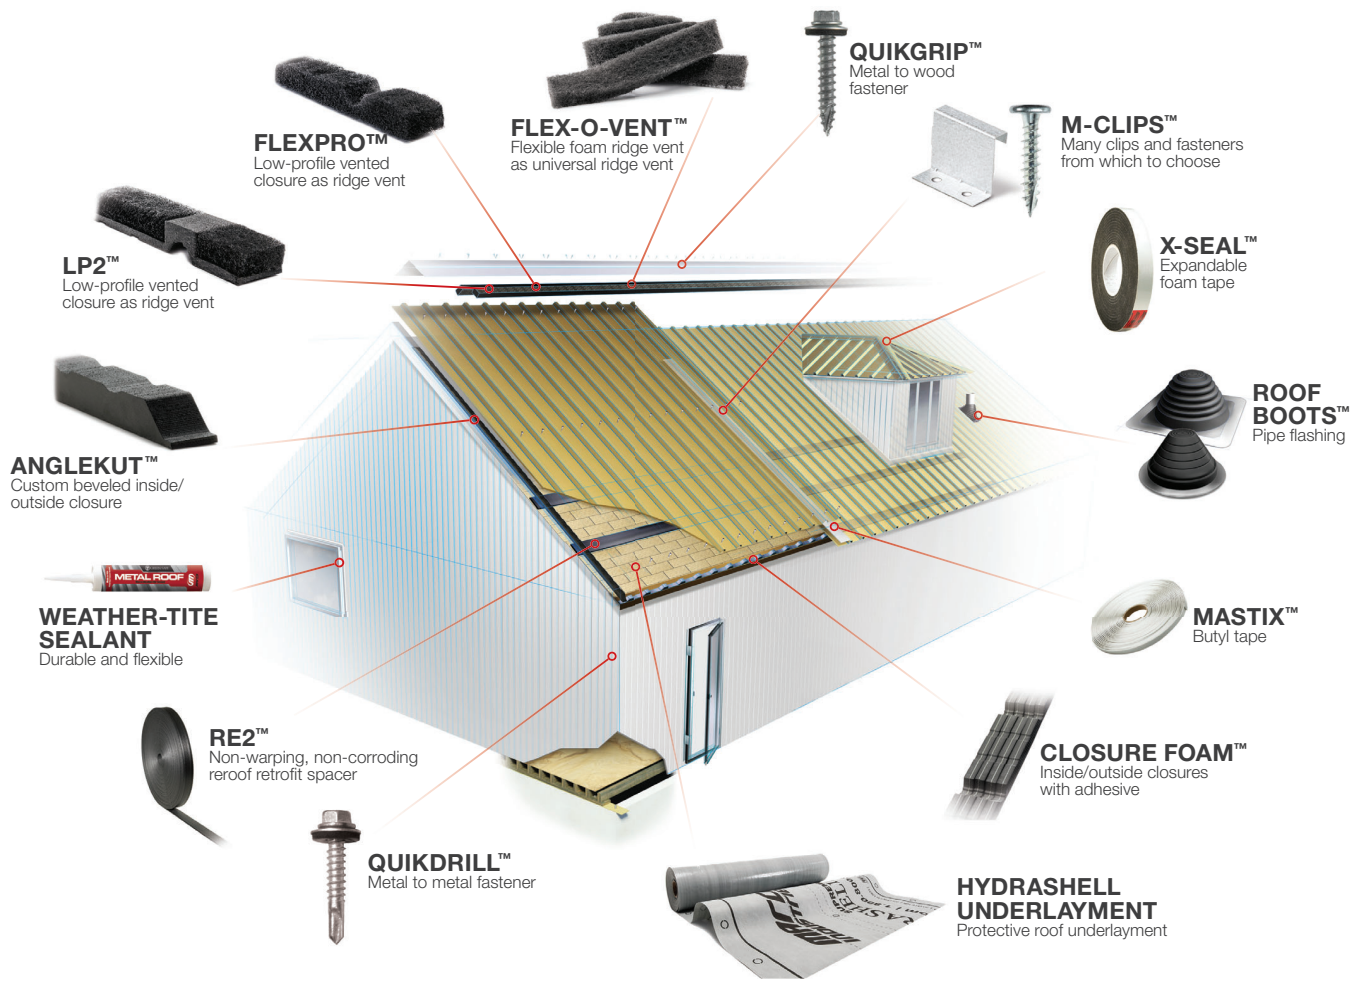

Roofing Ventilation & Accessories

800.800.8590 / MarcoIndustries.com



Marco's Rapid Response™ delivers, faster and easier. Take advantage of free shipping with low minimum orders.

VALLEY CAP

FLASHING APPLICATION SYSTEM

Designed to prevent leaks where Primary and Secondary Roofs Intersect With Valleys

Weather Protection Made of EPDM
These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

Available in two sizes

D-Cap A - For Pitch 7/12 or more

Opening	12-1/4" (311mm)
Inner Depth	3" (76mm)
Overall Height	1-1/4" (31mm)
Base	11-3/4" x 20-1/8" x 11-3/4" (298x511x298mm)

D-Cap B - For Pitch 6/12 or less

Opening	16-1/2" (419mm)
Inner Depth	3" (76mm)
Overall Height	1-1/4" (31mm)
Base	11-3/4" x 20-1/8" x 11-3/4" (298x511x298mm)

Advanced Ozone Resistance tested to..	EPDM 70 hour @ 500 pphm
High Temperature Resistance Intermittent Tested to Continuous	+135°C (+275°F) +100°C (+212°F)
Low Temperature Resistance tested to.....	-55°C (-67°F)
Compression Set Maximum...	25%



D-Cap A



D-Cap B

Easy On- Site Customization
Fast, one piece construction allows for easy on-site installation.

Adaptable Base
The base is designed to fit most roof pitches and valley conditions.

Eliminates Bulge and Maintains
Straight Ridge Line

20
YEAR
WARRANTY


Proudly made in North America



800.800.8590 / MarcoIndustries.com

Box Gutter Expansion Joint

Expandable Edge Strip Flashing

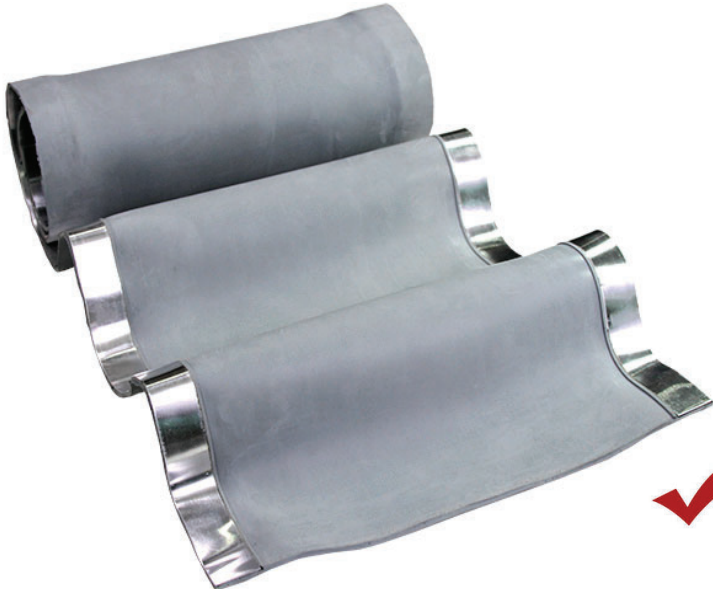

Features:

- 9" (228mm) width
- .059 mm thick
- 12ft., 33ft., and 50ft lengths
- Made of Grey ozone resistant EPDM

Applications:

- Transition Walls
- Parapet Walls
- Stepped Roofs
- Corrugated Metal Roofs
- Roof Penetrations
- Expansion Joint
- Skylights



For detailed product information or to speak with your salesperson call Marco Industries at 800-800-8590.

Box Gutter Expansion Joint

Compound	Part No.	Flashing Details
Grey EPDM	MFBGE912	9 in Wide 12 ft Long (9" x 12')
Grey EPDM	MFBGE933	9 in Wide 33 ft Long (9" x 33')
Grey EPDM	MFBGE950	9 in Wide 50 ft Long (9" x 50')



Value through the Roof.

800.800.8590 / MarcoIndustries.com



Marco's Rapid Response™ delivers, faster and easier. Take advantage of free shipping with low minimum orders.