

Closure Foam

DESIGNED TO STAY PUT

Marco's M63 industrial adhesive eliminates blow away problems with an adhesive bead applied to either the flat or the ribbed side of Closure-Foam.



CLOSURE
FOAM™

Features:

- ▶ Full bead (once installed) of adhesive applied.
- ▶ Thickness variety.
- ▶ Adheres in subfreezing temperatures and on wet surfaces.
- ▶ Profiles for every application.
- ▶ No excess scrap for easier cleanup.
- ▶ Eliminate gaps and ensure a snug end-to-end fit.
- ▶ Better UV resistance/longer lasting than competition
- ▶ 40-year limited warranty
- ▶ Economically priced without sacrificing quality.

EXPAND YOUR ROOFING SYSTEM PERFORMANCE
PREVENT LEAKS • PROTECT PROPERTY • ASSURE VENTILATION

INSTALLATION INSTRUCTIONS


VALUE DRIVES EVERYTHING WE DO

Value drives everything we do. That's why we developed a comprehensive line of ventilation products that offer easy installation, remarkable building ventilation, lower utility costs, extended roof deck life, extreme durability, and outstanding warranties. Get more quality, more performance, and more value...from Marco Industries.™

EASY INSTALL


See our installation online at marcoindustries.com

Closure-Foam can be installed by a single person in just three easy steps shown below.

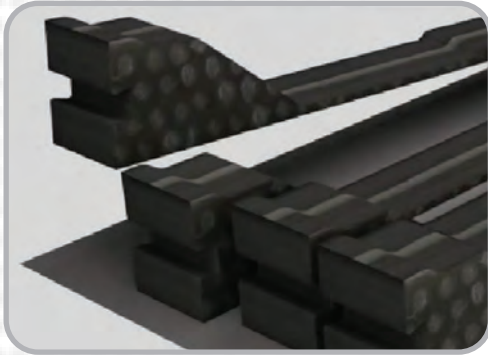


Step 1:

Ensure the self-adhesive closure configuration fits the roof panel used.

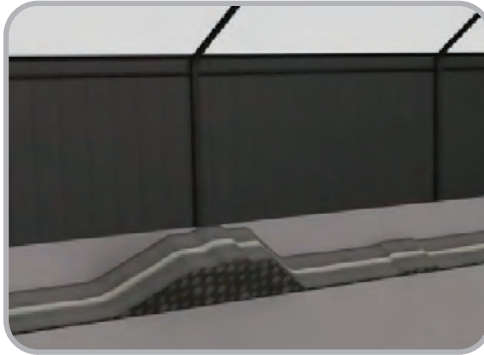

Step 2:

The inside Closure fits the underside of the panel.

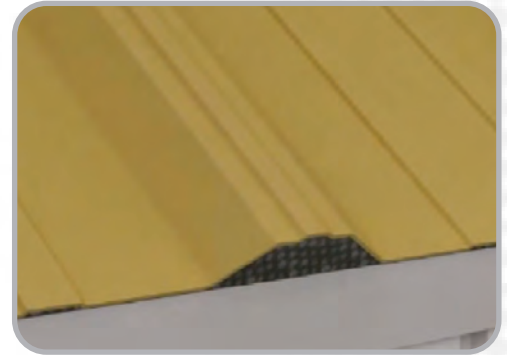

Step 3:

Place the roof panel over pre-cut closure configuration for a snug fit. Attach panel over closure with fasteners.

SPECS:

Tensile: 60 PSI Min (ASTM D412)

Flammability: Pass (FMVSS302) • Listed (UL 94 HF-1)

Service Temperature: -65°F TO +210°F

25% Compression: 6.0 – 7.0 PSI (ASTM D3575)

50% Compression Sets: 30% Max (ASTM D3575)

Density: 2 (+/-0.2) LB/FT3 (ASTM D3575)

Polymer: Cross-Linked PE



CLOSURE-FOAM



1-800-800-8590 / Marcoindustries.com

MARCO INDUSTRIES
Roofing Ventilation & Accessories